

1 **SHARED AUTONOMOUS VEHICLE FLEETS**
2 **TO SERVE CHICAGO’S PUBLIC TRANSIT**
3

4 **Yantao Huang**

5 Graduate Research Assistant
6 Department of Civil, Architectural and Environmental Engineering
7 The University of Texas at Austin
8 yantao.h@utexas.edu
9

10 **Krishna Murthy Gurumurthy, Ph.D.**

11 Energy Systems Division
12 Argonne National Laboratory
13 kgurumurthy@anl.gov
14

15 **Kara M. Kockelman, Ph.D., P.E.**

16 (Corresponding Author)
17 Dewitt Greer Professor in Engineering
18 Department of Civil, Architectural and Environmental Engineering
19 The University of Texas at Austin
20 kkockelm@mail.utexas.edu
21 Tel: 512-471-0210

22 **Omer Verbas, Ph.D.**

23 Energy Systems Division
24 Argonne National Laboratory
25 omer@anl.gov
26

27 Presented at the **61st Annual Meeting of the Southern Regional Science Association** (April 2022)
28
29

30 **ABSTRACT**

31 Shared fully-automated vehicles (SAVs) will provide different services in the future, including door-to-
32 door (D2D) service, first-mile last-mile (FMLM) connections to transit stations, and low-cost public transit
33 service. This paper leverages the agent-based simulator POLARIS to analyze the deployment of the D2D,
34 FMLM, and low cost transit SAV services for a 5% population sample of the Greater Chicago region. When
35 simulating D2D SAV service at \$0.50 per vehicle-mile (with dynamic ride-sharing [DRS] enabled), each
36 of the 12,000 SAVs (or 1 per 40 simulated travelers) served an average of 19.4 trips per day and attracted
37 12% of the region’s passenger-travel mode split (with an average person-trip length of 4.6 miles). Addition
38 of the SAV-based FMLM service (at \$0.50/mile fare, with DRS) raised the region’s transit shared from 5.4%
39 to 6.3% of all person-trips, while adding 12% more trip requests and 4% more vehicle-miles traveled to the
40 SAV fleet. Most FMLM service trips ranged from 1.7 to 1.9 miles in distance, with rail station connections
41 dominating the mix (versus bus stop locations). A willingness-to-pay or “welfare” analysis that suburban

1 area residents benefited most from the SAV D2D service, followed by those in the urban areas. And
2 residents near suburban transit stations benefited most from addition of SAV services.

3 **Keywords:** Shared autonomous vehicles; first-mile last-mile access; large-scale simulation; public
4 transportation; door to door service

5

6 INTRODUCTION

7 The advent of shared, fully-automated or “autonomous” vehicles (SAVs) may dramatically change travel
8 choices in coming years. Studies have demonstrated the added value of SAV fleets serving door-to-door
9 (D2D) travel (Childress et al., 2015; Fagnant & Kockelman, 2018; Narayanan et al., 2020). Trip-cost
10 savings are higher when rides are shared by travelers en route, also called dynamic ride-sharing (DRS),
11 much like UberPool and DiDi Pool. In addition to D2D service, low-cost SAVs may offer first-mile last-
12 mile (FMLM) connections to transit stations (Farhan et al., 2018; Gurumurthy et al., 2020; Pinto et al.,
13 2020; Shen et al., 2018) and serve fixed-route transit lines in relatively demand-responsive ways, eventually
14 replacing fleets of large, infrequent buses, with their relatively high labor costs (Quarles et al., 2020). While
15 simulations of D2D SAV service are becoming common, evaluations of SAVs for transit-type support are
16 rare (Brownell & Kornhauser, 2014; Martinez & Viegas, 2017). This paper extends the large-scale agent-
17 based POLARIS tool (Auld et al., 2016) to anticipate mode splits, response times, fleet operations, and
18 social welfare across a large U.S. region (of 13 million population) in a fully-integrated manner, to
19 understand the impacts of deploying several SAV-based services.

20 These are a D2D SAV service with and without DRS, a FMLM service for transit station connections, and
21 SAVs providing fixed-route fixed-stop bus services – all across the 20-county region. Lower-cost
22 operations, smooth vehicle acceleration and deceleration, improved safety, access for all (including those
23 with various disabilities or driving limitations), and centralized dispatch (for rather seamless ride-sharing)
24 are expected to make SAVs a convenient and common choice in coming years. SAVs may increase average
25 vehicle occupancy (AVO) and lower congestion through efficient DRS (Childress et al., 2015; Gurumurthy
26 & Kockelman, 2018). While this D2D service is convenient and low-cost, without sufficient ride-sharing
27 (among strangers) en route, total VMT may rise.

28 Example SAV deployments around the world (Stocker & Shaheen, 2019) now offer low-speed, geofenced
29 service (Hou et al., 2017). SAVs can provide more convenient and faster services to an from transit stations,
30 as compared to riding a bicycle or walking, while avoiding parking costs or reliance on family and friends
31 for such rides. As AV technologies mature, SAVs may take the lead public transit delivery. A bus- or mid-
32 size SAV may serve traditional fixed-route and fixed- or flexible-stop transit corridors, where heavy transit
33 demand exists, while offering shorter headways and more demand-responsive services - around the clock.
34 SAVs can also proactively relocate (and turn off and on, anywhere at any time), based on instructions from
35 central operators. The future of transit is bright, if public agencies leverage this technology.

36 To this end, this paper analyzes multiple methods of SAV deployment across the Greater Chicago region.
37 Impacts are revealed through response times, mode splits, network congestion, and consumer welfare under
38 different pricing and service strategies.

39

40

41 LITERATURE REVIEW

1 Numerous studies predict AV impacts on travel choice and traffic, safety, cost, and the environment
2 (Narayanan et al., 2020, Gurumurthy et al. 2019, and Zhao & Malikopoulos 2019). Most SAV studies
3 focus on D2D service, and few enable inter-modal and multi-modal operations for SAV users .

4 Narayanan et al.'s (2020) review concluded that incorporating public transit is essential when studying
5 SAV use. Snelder et al. (2019) explored SAVs' mobility impacts in mixed traffic environments, via a
6 special model specification to ensure elastic demands, across destination and mode choices. Merlin (2017)
7 simulated SAVs and transit use for the relatively small Ann Arbor, Michigan network, with a focus on
8 transit impacts. He estimated that SAVs will be preferred to buses, thanks to lower travel times and travel
9 costs per day, alongside lower carbon emissions.

10 Compared simulating SAVs offering only D2D service, integration with transit stations for intermodal trip-
11 making is more complicated. Such systems must find shortest paths across many mode and stop
12 combinations, while still ensuring on-demand service for the first and last miles. Yap et al. (2016) carefully
13 surveyed traveler preferences for AVs in an integrated public system and predicted that AVs had the most
14 potential for first-class train travelers using SAVs in their "last mile" (to a final destination). Abe (2021)
15 investigated 2,300 Tokyo residents' willingness to use SAVs for FMLM connections to urban rail transit.
16 Those with station-access issues were most inclined to use SAVs in this way, as a substitute for feeder bus
17 and personal cars, but not for cycling and walking (to and from urban train stations).

18 Zachariah et al. (2014) synthesized New Jersey person-trip data to simulate SAVs providing FMLM
19 service to that US state's train stations, with substantial potential for rideshare, especially during peak train
20 (arrival and departure) hours. Vakayil et al. (2017) simulated SAV services across different transit
21 frequencies, transfer costs, and SAV relocation strategies. They estimated up to 50% reduction in network
22 congestion and vehicle emissions thanks to FMLM services. Gurumurthy et al. (2020) compared an SAV
23 fleet's FMLM service to a D2D service across the Austin, Texas region through a 5% sample simulated in
24 MATsim. Pricing decisions were key to mode splits and traffic impacts. Shen et al. (2018) simulated
25 Singapore's mass-transit system (just 4.6 square miles) during morning peak hours, and estimate that such
26 services will enhance system efficiency, using fewer road resources and being financially sustainable.

27 While FMLM connections by themselves may improve the attractiveness of rail systems and some bus lines,
28 transit lines based on high-frequency, self-driving minibuses or SAVs can also increase transit ridership.
29 Current studies of SAV-based transit focus mainly on acceptance (Bernhard et al., 2020; Nordhoff et al.,
30 2019), so planning and operational insights are still lacking. For example, Mirnig et al. (2020) surveyed
31 and concluded that the functionalities of booking and reserving spots in an automated bus will have more
32 impacts on vulnerable populations (like the disabled and aged). Bernhard et al. (2020) explored 942
33 participants' willingness to use self-driving minibuses in Mainz, Germany, and found respondents to be
34 most concerned about system safety and environmental benefits. Moorthy et al. (2017) compared costs of
35 conventional public transit to a hypothetical SAV system for transit between Ann Arbor and Detroit's
36 Wayne County Airport, with simplified network and operating assumptions. They estimated at that SAVs
37 could provide up to 37% energy savings, depending on vehicle powertrain and ridership parameters. They
38 neglected vehicle stopping and routing, for thousands or millions of origin-destination pairs, which is what
39 real systems will seek to address.

40 Few papers have examined realistic systems of SAV-based *transit* lines (Gurumurthy et al., 2019; Harb et
41 al., 2021; Narayanan et al., 2020; Zhao & Malikopoulos, 2020). SAVs (of various seating capacities) may
42 be the future of bus-type transit. So a thorough investigation on the operations of an integrated system
43 recognizing various SAV services is warranted and is the prime motivation for this study.
44


45

46 **DATASET**

1 This study simulates vehicle and person movements across the 11,116 sq. mi Chicago region. This large-
2 scale network has 1,961 traffic analysis zones and about 32,000 road links (Figure 1a) and 33,000 transit
3 links (Figure 1b). The daily travel patterns from 2.6 million travelers from 1 billion households across the
4 region were synthesized by Auld et al. (2016), leveraging the region’s CMAP travel survey data.

5 Chicago’s transit network was obtained as a General Transit Feed Specification (GTFS), and then organized,
6 tested and calibrated by Verbas et al. (2018) for the POLARIS model. The Chicago Transit Authority (CTA)
7 provides service in the City of Chicago and 10 surrounding suburbs, while the PACE suburban bus serves
8 a larger area, connecting six counties, including Cook, Lake, Will, Kane, McHenry, and DuPage (APTA,
9 2021; CTA, 2016). This paper’s transit-line SAVs are assumed to replace regular bus service (excluding
10 bus rapid transit), but at half the seating capacity (per automated bus) in order to double each line’s
11 frequency. Chicago’s METRA and South Shore are both commuter rail services, and assumed to maintain
12 their status quo. A total of 349 unique transit lines were coded into the model, with 134 from CTA and 202
13 from PACE (Verbas et al., 2018). Buses used for CTA and PACE’s regular bus services are set to have 30
14 seats plus standing capacity for 30 travelers. Considering different departures for each transit line, about
15 2,100 routes were assembled to offer 28,000 total transit trips throughout a workday. The bus stops are also
16 considered “stations”, though train stations are typically larger, with more amenities.

17

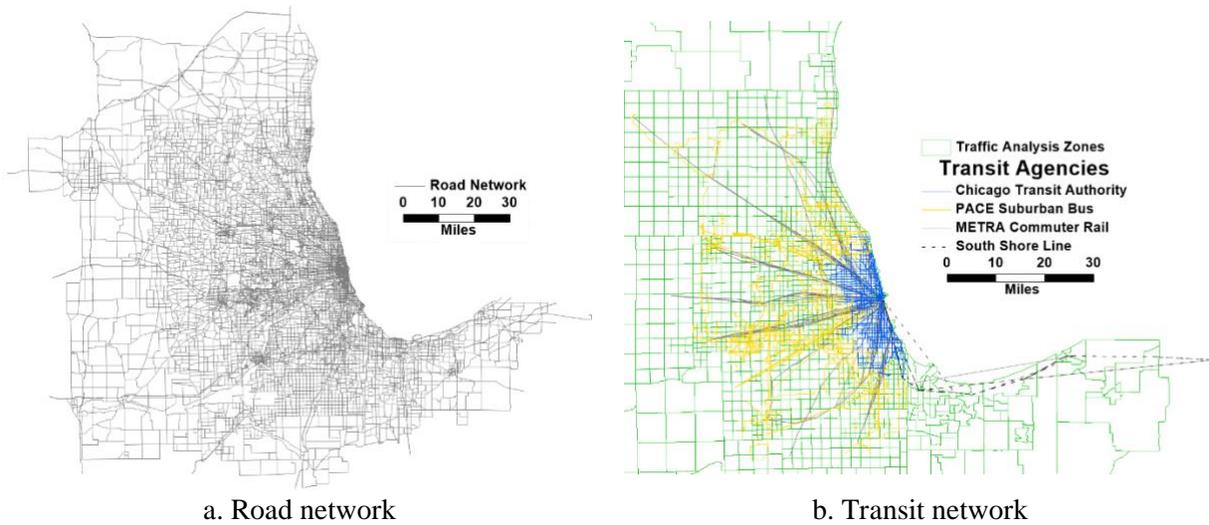

18

Figure 1. Chicago Network

19 **POLARIS MODEL**

20 POLARIS is a large-scale multi-agent activity-based travel demand model which simulates both person and
21 freight trips for a 24-hour day. The model is initialized with a population synthesis module (see Auld &
22 Mohammadian, 2010), which includes home, school, and work location choices for synthesized households
23 and individuals based on data from U.S. Census tracts, Public Use Microdata Areas (PUMAs), and the
24 American Community Survey (ACS). With person and household level details known from the synthesis
25 step, all activities expected to be made by each agent in the 24-hr period are generated. A hazard-based
26 formulation is used to produce start times and durations for each of these activities (Auld et al., 2011). The
27 activity plan for each individual agent is then updated to include an activity location (through a multinomial
28 logit destination choice model) (Auld & Mohammadian, 2012) and mode (through a nested logit mode
29 choice model for different trip types). The travel scheduling process incorporates four different travel
30 choices, which are the destination choice, mode choice, departure time choice, and travel party choice (Auld

1 & Mohammadian, 2011; Gurumurthy et al., 2020). Conflicts among activity plans and travel schedules are
2 managed via a conflict monitor in a rescheduling model (Auld et al., 2009). With all trips defined for each
3 traveler, dynamic traffic assignment is used for vehicle routing and the link-level congestion is reflected
4 through a link transmission model.

5 **Shared Automated Vehicles' Door-To-Door Service and Dynamic Ride-Sharing**

6 POLARIS currently allows for D2D solo traveler simulation (Gurumurthy et al., 2020) as well as dynamic
7 ride-sharing (Gurumurthy & Kockelman, 2020) and this is fully integrated with all traveler choices and
8 congestion feedback. Travelers choose to ride in a TNC through mode choice and request a ride from the
9 TNC operator. The operator is aware of all vehicles in the region and their specific locations. This allows
10 for centralized dispatch control and helps assign trips to nearby vehicles efficiently. A zone-based approach
11 is taken to store vehicles in underlying TAZs for computational efficiency. Although the nearest vehicle is
12 not matched, the first available vehicle falling within a pre-defined maximum wait time threshold is
13 assigned to maintain acceptable service.

14 The DRS module matches new trip requests to vehicles idling or en route to its pickup or dropoff. The
15 match is made such that the request's destination is along the direction of ongoing travel with slight
16 modifications based on the exact operation that is ongoing. If a pickup trip is ongoing, the current and
17 ongoing trip is in the same set of TAZs within the pre-defined maximum wait threshold time from the use
18 of zone-based storage of vehicles, and is easily matched. If a dropoff is ongoing, and is in the same set of
19 TAZs as the new request's origin, then these trips are bundled. If a dropoff is ongoing and the destination
20 is further away, the angle between Euclidian lines of ongoing trip and the request is calculated. The request
21 is matched if this angle is within a pre-defined threshold of 10 degrees. This helps manage detour time
22 added to the traveler when sharing their ride. Once matched, all requests assigned to a vehicle is ordered
23 for minimal Euclidian distances while taking into account pickup-dropoff constraints (i.e., a traveler cannot
24 be dropped off before being picked up). The activity-based model in POLARIS currently allows only
25 single-party trip requests, so all requests matched to vehicles take up one seat space. In reality, travelers are
26 expected to travel in party sizes greater than 1, with their friends and family, so the DRS results can be
27 conservative estimates of what is possible when the fleet is deployed. No traveler-side model is used to
28 determine sharing choice, so all travelers are subject to share their trips when DRS is allowed. Therefore,
29 single-party trips and full sharing adoption is likely to balance out the extremes expected from their
30 individual effects.

31 **First-Mile-Last-Mile Modes**

32 This study focuses on the simulation of first-mile-last-mile modes across several service types. The full
33 integration of this new mode involves both supply and demand side changes in POLARIS. On the demand
34 side, travelers willing to choose FMLM as a mode need to be identified appropriately based on destination
35 and time of day. These trips then need to be routed appropriately by utilizing multimodal shortest paths that
36 take into account time-varying travel times and congestion.

37 *Mode Choice and Feedback Iteration*

38 The SAV D2D service is assumed to replace the traditional taxi service with adjustments to its cost
39 assumptions. The FMLM service is added to the mode choice model as two new modes. One uses SAV
40 FMLM service to access and egress bus transit stations, and the other connects rail transit stations. Rail
41 transit in the model includes both commuter rail and light rail. Since SAVs have not been widely deployed
42 for FMLM service, there is no revealed preference data to calibrate the utility functions of the two new
43 modes. Here, the parameters and variables of the FMLM utility functions are adopted from both the existing

1 taxi, bus, and rail modes by considering travel time and cost of both SAV and transit trips, penalties for the
2 number of transfers, and also demographic attributes of the traveler. Both SAVs' travel time for D2D
3 service and SAVs' access and egress travel time for FMLM service are recorded and fed back to the mode
4 choice model in following iterations, until the simulation arrives at the equilibrium of mode shares.

5 *Multi-modal Passenger Routing*

6 The FMLM service in the model is considered to use SAVs to connect trips to and from transit stations.
7 These routes are calculated based on the multimodal shortest path, which is built based on the shortest
8 link prevailing travel times from origin to destination, leveraging network links of all possible types (e.g.,
9 driving, walking, or transit links). Adjustments and penalties are also incorporated to ensure a reasonable
10 multimodal path, including the number of transfers, walking time, and driving distance. As long as a
11 multimodal shortest path contains at least one SAV path segment, the trip is identified as a FMLM trip.
12 Transfers are allowed between different transit lines, and such transfers can involve either walking trips or
13 otherwise, to mimic the case when a person can transfer at the same station or walk to another nearby
14 station for transfer. For normal bus and rail trips, in which riders simply walk from/to stations, the station
15 can be accessed within about 3 miles of walking distance. However, there is no distance constraint for
16 accessing and egressing transit stations using the FMLM service. Although the multimodal shortest path
17 algorithm identifies the shortest driving path for SAVs, the actual FMLM service with dynamic ride-
18 sharing will not exactly follow the shortest driving path, due to some detours of pickups and drop-offs for
19 shared rides. This multimodal routing scheme is an extension to the multimodal A* that was already
20 implemented in POLARIS (Verbas et al., 2018).

21

22 **APPLICATION AND RESULTS**

23 Different FMLM and transit services were simulated for the Greater Chicago region. The baseline scenario
24 is the year 2018 Chicago run using 5% of the total synthesized population, which ended up with 201k
25 households and 520k persons. The business as usual (BAU) case in Figure 1 shows the mode share for the
26 calibrated baseline, in which there are no SAV services but only taxi service is provided. The single-
27 occupancy vehicle (SOV) dominated the travel mode, followed by the high-occupancy vehicle (HOV).
28 Transit travel share were about 5% across the whole area, but significantly higher in the City of Chicago
29 (at 30%), while taxi travel accounted for about 4%. There is a \$3.3 fare for taxi service, which further
30 charges \$1.5 per mile. Based on the BAU case, scenarios involving SAVs were designed to have one
31 additional SAV service each time, so one can see the incremental changes of the new SAV service brought
32 to the whole network. The first change was to use SAV D2D service to replace traditional taxi service
33 across the whole region, the second one added SAV's FMLM service, and the last one further added SAV-
34 based transit to replaces the regular bus service (CTA and PACE bus lines). All the scenario runs simulated
35 a 24-hour weekday, starting from midnight.

36 **SAV Door-to-door Service**

37 The first scenario tested SAVs' D2D service as a replacement for traditional taxi service across the whole
38 network. SAVs have the same vehicle behavior as cars or taxis, but charges a lower fare compared to taxis.
39 Assuming a future that uses mature automation technology, the SAV D2D service is priced at \$0.50 per
40 mile, based on the predictions and assumptions in previous studies (Becker et al., 2020; Bösch et al., 2018;
41 Fagnant & Kockelman, 2018). Each SAV was deployed for 40 persons on average across the network, so
42 approximately 12 thousand SAVs are in use in the simulated day. The large fleet of SAVs may also lead to
43 many households relinquishing their old vehicles and reduce household vehicle ownership. Therefore,

1 Menon et al.’s (2019) vehicle ownership reduction model was leveraged to update the new vehicle
 2 ownership distribution under the impacts of SAV on-demand services. Under the impact of SAVs’ reduced
 3 cost and the households which lower their vehicle ownership, the SAV D2D services gained more than 10%
 4 of the mode share (see SAV-D2D in Figure 2), mostly borrowing from the SOV mode. The HOV mode
 5 share also increased to about 20%, compared to 12% in the baseline scenario, because of the reduced vehicle
 6 ownership and increased necessity to share rides.

7 Table 1 shows the fleet performance of the 12k SAVs serving 5% of the synthesized Chicago population.
 8 One SAV operated more than 4 hours a day, generating 131 VMT on average by serving nearly 20 requests,
 9 but 25% of them were just empty travel (i.e., traveling without passengers onboard). The SAV fleet offered
 10 an average 15-minute service (riding time + wait time) for D2D riders, who rode 4.6 miles on average. The
 11 average distance corresponds with the trip-length distribution in Figure 3a, which peaks at trips longer than
 12 0.5 mile but shorter than 1.5 miles. Figure 3a also tells that most riders prefer using the SAV D2D service
 13 for short-distance trips, but also some prefer sharing long rides that are more than 50 miles in the large
 14 Chicago region.

15 Table 1 Non-transit SAV Fleet Performance with DRS(SAV-D2D & SAV-FMLM)

Scenarios	SAV-D2D	SAV-D2D + SAV-FMLM	SAV-D2D + SAV-FMLM + aBuses
Avg. Travel Time per Person (min per person-trip)	10.0 min	12.6	12.3
Avg. Wait Time per Person (min)	4.9 min	4.6	4.3
# SAV Requests/day	232,247 SAV rides/day	260,355	259,685
% Requests Met (with 15-min max wait time)	99.4%	98.8%	99.0%
AVO by Revenue-trips	1.10 persons/vehicle	1.13	1.11
AVO by Revenue-miles	1.05 person	1.05	1.05
Avg. Person-Trips/SAV/day	19.4 trips/day	23.6	23.5
% eVMT	25%	26%	25%
SAV VMT/person/day	3.03 mi	3.16	3.11
VMT/SAV/day	131.4 mi/SAV	136.9	134.9
Hours in Operation/SAV/day	4.2 hr	4.4	4.3

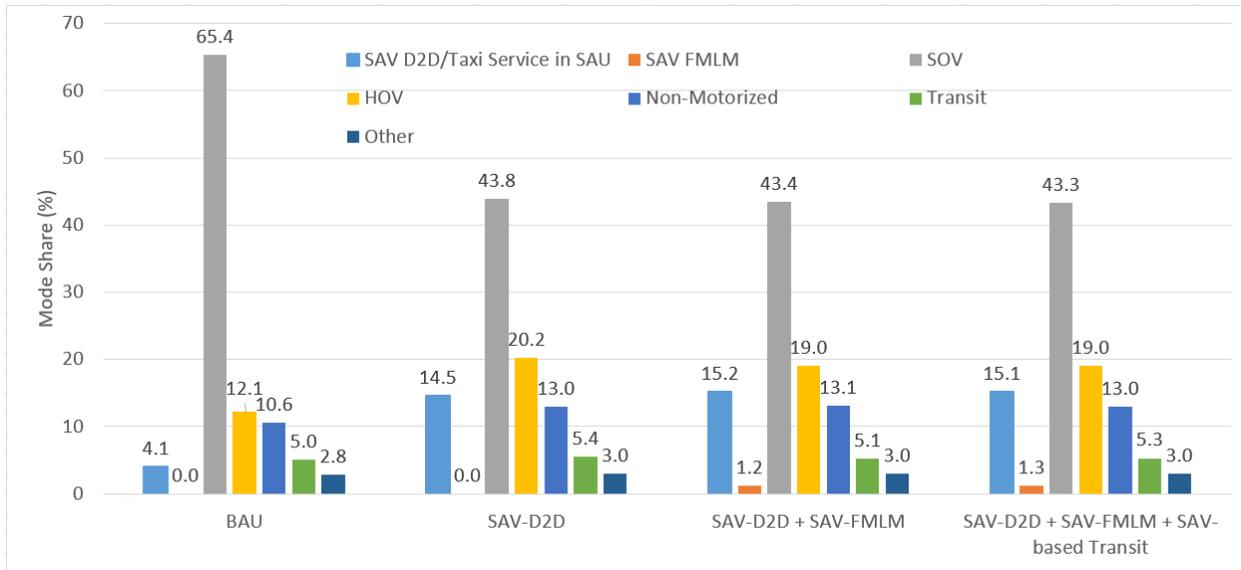



Figure 2. Mode Splits across Different SAV Scenarios

SAV FMLM Service


The SAV FMLM service is incorporated into the simulation when the SAV D2D service is already available. Adding an SAV FMLM service on top of a D2D service would not only make up for the gap in previous studies that do not incorporate SAV demand to/from transit stations, but also explores the situation when the SAV fleet provider and the transit service provider cooperate to form an integrated and more efficient transit system.

The new SAV FMLM service raised the total transit mode share from 5.4% to 6.3% (sum of FMLM mode and transit mode in Figure 2, “SAV-D2D + SAV-FMLM” scenario), while the other modes remained quite stable. The mode share increment in transit was relatively small, but this is still a good sign for promoting transit use and increasing the transit catchment area, especially since this scenario is discussed under the availability of the SAV D2D service, which can already be popular for shared mobility. Without SAV D2D service, or when the automation technology is not mature enough and SAVs are only capable of providing low-speed FMLM service in geofenced regions, more transit demand may be attracted (Huang et al., 2020).

Since D2D and FMLM requests were both needed to be served by SAVs, the fleet was better utilized, as seen from the increased SAV VMT per day and operating hours, as well as more trips served per SAV (Figure 1). However, the gain in fleet utilization is small due to the low FMLM share. For the 5% sample simulated, there are about 22k FMLM service requests (to/from transit stations), which are 10% of the D2D service requests. Interestingly, the travel time is about 2.6 minutes longer per travelers compared to D2D service only, due to more trip requests (thus more rerouting), but the wait time is slightly lower because of the request aggregation at the transit stations.

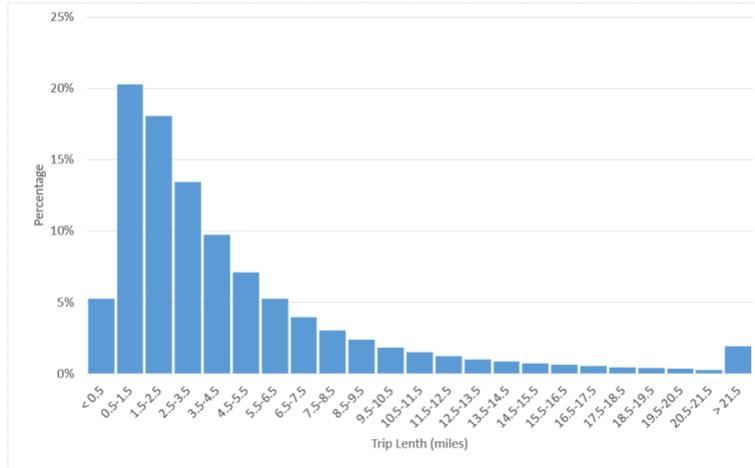

a. SAV door-to-door service

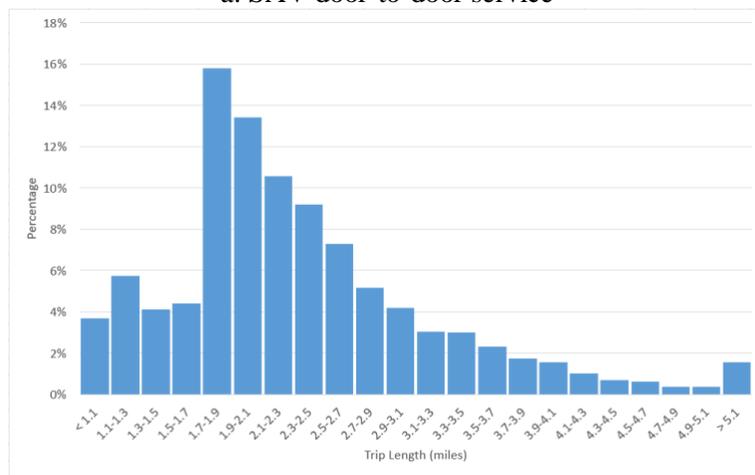

b. SAV first-mile last-mile service

Figure 3. SAV Trip Length Distribution

1

2 In contrast to the long average trip length for SAV D2D services, FMLM SAV trips were shorter, as
 3 expected (Figure 3b). Most FMLM trips were about 1.7 to 1.9 miles, but there were some FMLM trips
 4 longer than 5 miles. Since walking to transit stations is usually 0.25 miles on average (Nabors et al., 2008),
 5 implementing the FMLM service largely increased the transit catchment area. As seen from the low share
 6 of FMLM trip distances shorter than 1.1 miles, most riders who walk to transit stations will probably retain
 7 their previous behavior, but a few will shift to the new FMLM SAV service (indicated by the drop in the
 8 mode share). Therefore, FMLM service will mostly attract those who live from 1.7 to 3.5 miles away from
 9 transit stations, which is usually beyond the walking distance for accessing and egressing these transit
 10 stations. This can also be reflected through Figure 4, especially Figure 4b and 4c, that most boardings of
 11 FMLM trips happened not far from the transit lines. For example, the radial pattern follows the PACE
 12 suburban bus and the METRA commuter rail, while downtown Chicago is where most of the CTA bus
 13 stations are located.

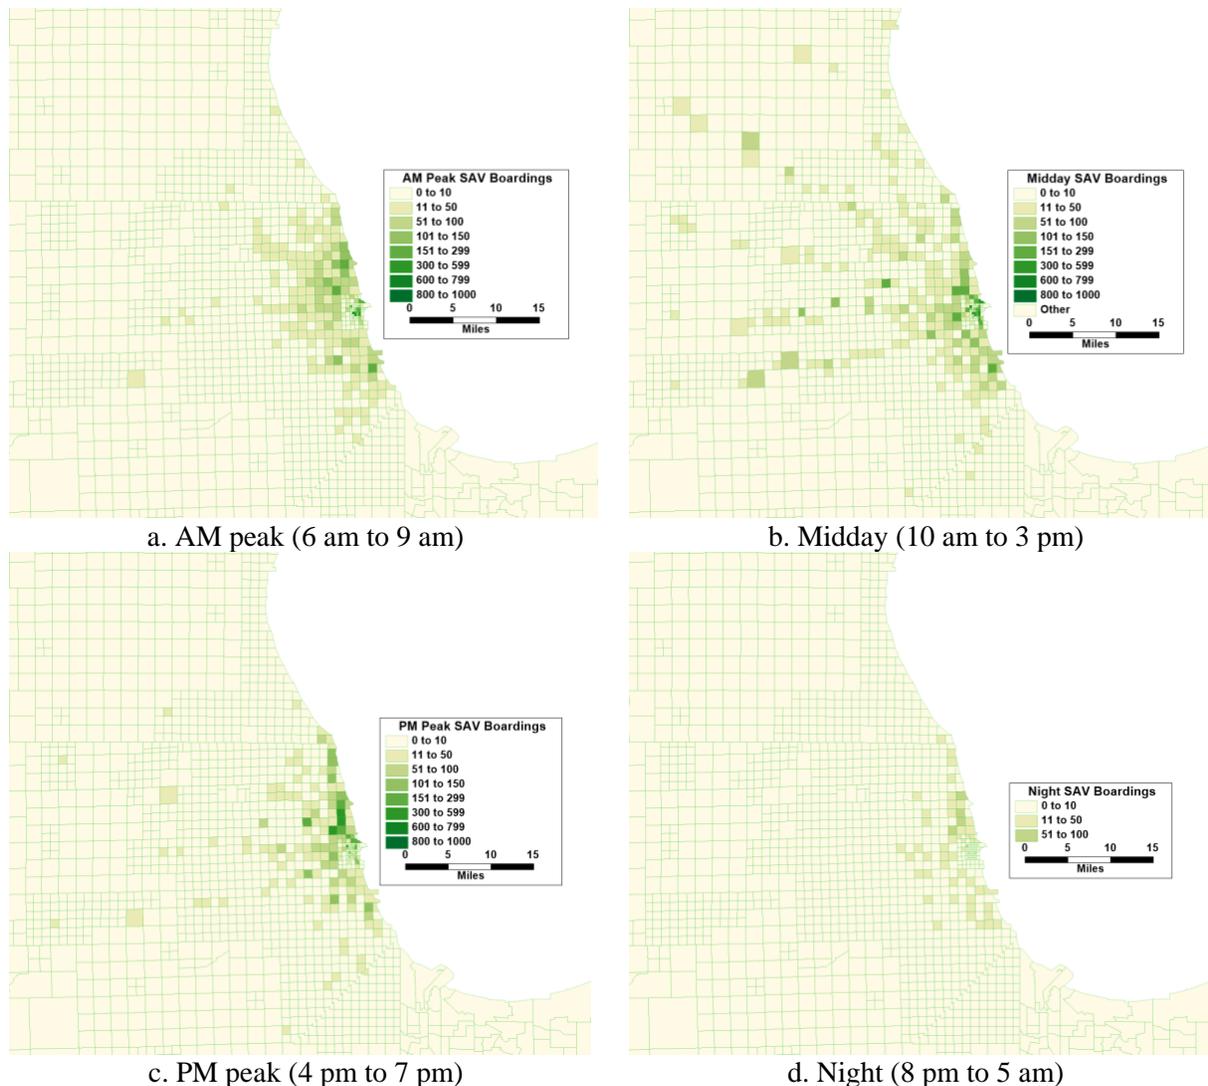



Figure 4. Boardings of FMLM SAV Service by Four Times of Day

1

2 Figure 4 presents the spatial and temporal distribution of the boardings onto the SAVs which offer FMLM
 3 service. People are shown to prefer FMLM SAV service in the day rather than the nighttime when few
 4 buses and rail lines are operating. Midday is the time when boardings happened the most and are more
 5 spatially spread out. Downtown Chicago is the busy zone for FMLM trips, which can be either first-mile
 6 or last-mile trips. This also tells that one end of the whole trip (considering both FMLM and transit trip
 7 segments) mostly occur downtown but the other end is often near the transit lines, especially at those in
 8 suburban areas.

9 Figure 5 further shows the distribution of FMLM trip counts by the hour, while differentiating trips
 10 accessing and egressing bus stations from rail stations. The trip counts over time follow the pattern in Figure
 11 4. Few buses and rail lines were operating before 6 am so the SAV use for connecting transit stations was
 12 rare. The highest peak across the day happened at 9 am, and the second peak happened in the afternoon at
 13 5 pm. Interestingly, the third small peak happened during the midday at 1 pm, although during midday there
 14 was a drop after the morning peak hours. The lunch trips are often short so the midday trips are expected
 15 to be minimal. However, there may still exist several commuting trips or other business trips by travelers
 16 who work with flexible schedules. Figure 5 also shows that trips to/from rail lines are dominating the

1 FMLM trips, with a ratio of 6 to 1. This is expected because rail trip is often longer, not impacted by the
 2 road congestion, and has longer access and egress distance compared to bus trips. Therefore, accessing and
 3 egressing rail stations using the FMLM SAV service may reduce the total trip cost, considering the transfer
 4 penalties and walk/ride times. However, many bus riders already have one or two transfers between bus
 5 trips and often have shorter access and egress walking distance, so adding another SAV trip to the whole
 6 journey would largely raise the transfer burden and, thus, the overall trip cost. In addition, commuter or
 7 light rail stations often have pick-up or drop-off areas nearby, but this is not the case for every bus station.
 8 If too many SAVs access and egress bus stops, curbside congestion may be serious, and, thus, more road
 9 congestion could increase the overall trip cost.

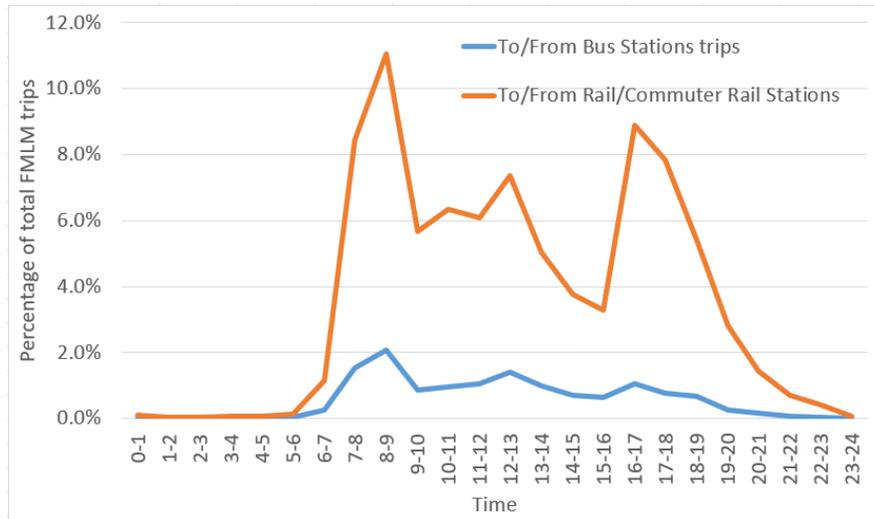

10
 11 Figure 5. First-mile Last-mile Trip Count Distribution by the hour

12 **SAV-based Transit Service**

13 Next, in addition to SAV’s D2D and FMLM service, the scenario discussed in this section further uses
 14 SAV-based transit service to substitute the regular CTA and PACE bus service with new 15-seat SAVs
 15 following a doubled dispatching frequency. The 15-seat SAVs also have 15 standing spaces, mimicking the
 16 current SAV shuttles that are tested around the globe (Stocker & Shaheen, 2019). Since this scenario
 17 assumes that the SAV’s D2D and FMLM services exist, the SAV-based transit or automated bus (Abus) is
 18 also assumed to have mature automation technology. The SAV-based transit fare is assumed to be 60% of
 19 the traditional transit service (Quarles et al., 2020), since Abuses can reduce the operating cost by
 20 eliminating the need for drivers.

21 With a 40% reduced fare for the SAV-based transit service, the mode share of transit slightly increased.
 22 Similarly, a 5% increase in FMLM mode share was noted (Table 1). Since most of the FMLM trips were
 23 connected to rail stations, the fleet performance of SAV’s D2D and FMLM service remained quite stable
 24 (Figure 2). This means that the SAVs’ on-demand service and the transit-based bus service may not have
 25 frequent interactions in this case.

26 However, there is potential to integrate the Abus service and the FMLM service. For example, the pricing
 27 of the service can combine the fare for the FMLM and Abus services. The transit use could be promoted if
 28 the FMLM price is halved when connecting to bus stations, or the transit fare can be eliminated if people
 29 are willing to take shared rides to access or egress bus transit. More importantly, the utilization of the SAV
 30 fleet could be improved through self-relocation and shared-use between these two different services. In this

1 paper, the SAV on-demand service (D2D service and FMLM service) uses 4-seater vehicles, while the
 2 Abuses are 15-seaters with 15 standing spaces. These 4 seat vehicles can sometimes help serve part of the
 3 existing transit lines or some lines that do not have high demand, while the 15seater SAVs can also help
 4 cater to demand for on-demand services.

5 **Welfare Analysis**

6 Welfare analysis has been widely used to compare the social benefit change across scenarios in terms of
 7 different policies, like new highway insertion (Kockelman & Lemp, 2011) and congestion pricing (Li et al.,
 8 2020). In this paper, the incremental change in social welfare of introducing different SAV services are
 9 presented as the changes in consumer surplus. In this study, the changes in consumer welfare or surplus
 10 (ΔCS) from one scenario to another for each traveler was computed as the logsum differences between
 11 those two scenarios (de Jong et al., 2007).

12 A person's consumer plus (CS) is added benefits or willingness to pay beyond what one actually pays for
 13 a good or service. If the unobserved error term of the logit model's utility function is independent and
 14 identically distributed (IID) Gumbel and the utility is linear in income, the expected maximum utility
 15 achieved (across alternatives) is the logsum of the logit choice utilities (de Jong et al., 2007). Therefore, the
 16 change in consumer surplus (expressed in monetary units) for a certain traveler i given a new scenario
 17 (identified with a superscript 1) with respect to the status quo (identified with a superscript 0) is follows:

$$18 \quad \Delta CS_i = \frac{1}{\alpha_p} \{ \logsum_i^1 - \logsum_i^0 \}$$

19 where the logsum incorporate the mode choice utilities. The logsum term is the natural log of the sum of
 20 all exponential functions of the utilities in the choice set:

$$21 \quad \logsum = \log \left(\exp(U_{bicycle}) + \exp(IV_{auto} \times \log(\exp(U_{SOV}) + \exp(U_{TAXI}))) + \exp(U_{HOV}) \right. \\
 22 \quad \quad \quad + \exp(IV_{rail} \times \log(\exp(U_{PARK_AND_RAIL}) + \exp(U_{RAIL}))) + \exp(U_{WALK}) \\
 23 \quad \quad \quad + \exp(IV_{bus} \times \log(\exp(U_{PARK_AND_RIDE}) + \exp(U_{BUS}))) + \exp(U_{TNC_AND_RIDE}) \\
 24 \quad \quad \quad \left. + \exp(U_{TNC_AND_RAIL}) \right)$$

25 Personal owned vehicle and taxi travel are nested under the automobile nest. Rail nest consists of rail modes
 26 that have walking as both access and egress mode, and personal car as the access mode and walking as the
 27 egress mode. Similarly, bus nest consists of bus modes that have walking as both access and egress mode,
 28 and personal car as the access mode and walking as the egress mode. High occupancy vehicle, walk, bicycle,
 29 and FMLM last modes are assumed not nested with any other modes. When a choice is considered not
 30 available, the utility is set as a large negative value, so the $\exp(U)$ value is nearly zero.


31 In this paper, three different comparisons are conducted: 1) adding SAV D2D service compared to the base
 32 case, 2) adding SAV FMLM service to SAV D2D scenario with SAV D2D scenario to be the baseline, 3)
 33 adding SAV-based transit to SAV D2D+FMLM scenario with SAV D2D+FMLM scenario as the baseline.
 34 Furthermore, ΔCS was aggregated at the TAZ level and averaged across the synthesized population in the
 35 corresponding TAZs.

36 Implementing SAV D2D service increased the social welfare of most people in urban and suburban Chicago
 37 (Figure 6a). Although the urban area experienced a small increase, many TAZs in the suburban area
 38 experienced an increase of more than \$6 per person per day. This is because the fleet of SAVs improved
 39 the mobility of the whole area, especially in the suburban area where people used to travel by car and or
 40 transit. Downtown Chicago has a well-connected transit system, so the welfare increase is limited. Since

1 the suburban area and the urban area were the places where most of the shared rides happened, some rural
2 areas experienced a welfare loss.


3 When further adding the FMLM service, the social welfare in downtown Chicago remained stable (Figure
4 6b). This is also due to the well-connected bus and rail transit system, where people sometimes can easily
5 replace the FMLM trip with walk and bus trips. However, a more mixed pattern was observed for the
6 suburban area. TAZs which experienced welfare increase are more likely to be the TAZs near transit
7 stations (e.g., within 3.5 miles). Since the SAV fleet size is fixed, the riders outside the 3.5-mile buffer of
8 the transit stations may have longer wait times for SAVs and longer detour times in shared rides, compared
9 to the case when only D2D service was provided. Therefore, these people are likely to suffer welfare loss.

10 The pattern of the welfare change when adding the SAV-base transit is similar to the case when adding the
11 FMLM service. The SAV-based service, which has lower fares and more frequent service but smaller
12 vehicle capacity, has attracted more riders, but travelers are also more likely to skip D2D SAVs and wait
13 longer at the station due to the small SAV-transitcapacity. The road congestion of the transit corridor may
14 also increase due to more SAVs being dispatched. Therefore, a mixed pattern of social welfare change is
15 shown in Figure 6c.

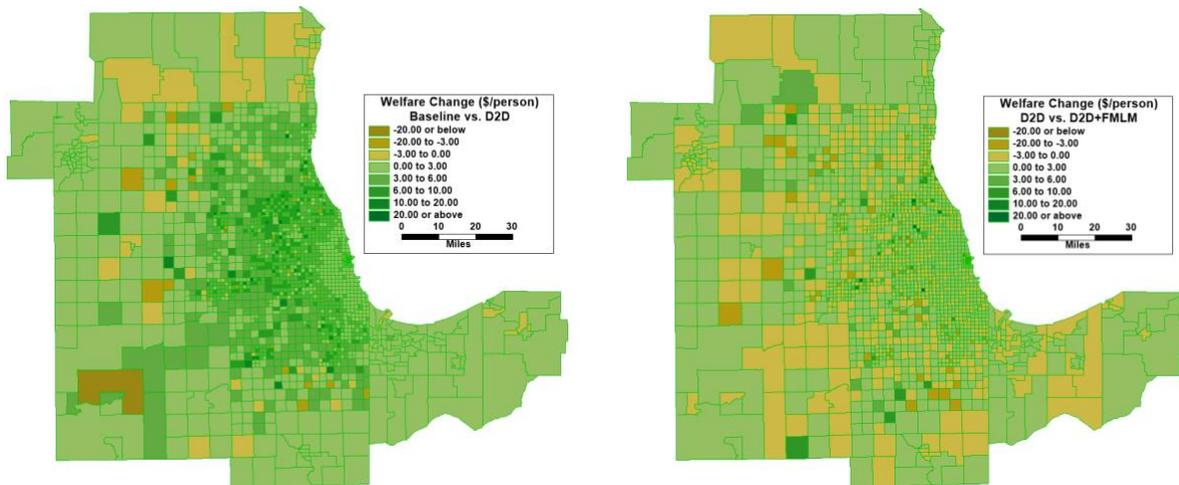

a. Baseline vs. D2D

b. D2D vs. D2D + FMLM

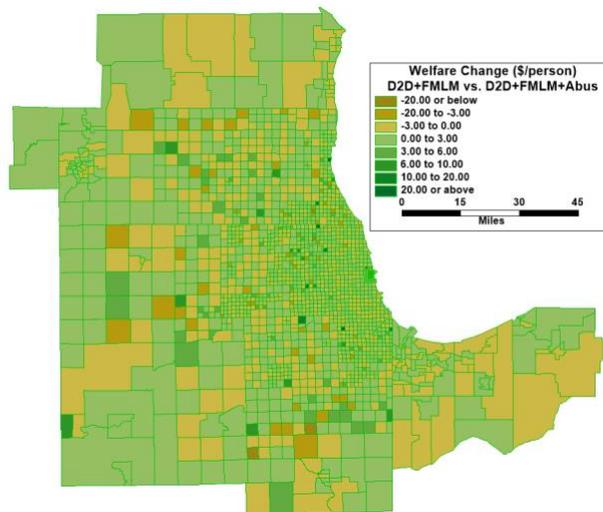

c. D2D + FMLM vs. D2D + FMLM + SAV-based Transit

Figure 6. Welfare Change (\$/person)

CONCLUSIONS

This study integrates SAVs' D2D service, FMLM service, and the SAV-based transit service, and reveals the possible mode shares, fleet performance, and social welfare change for the 5% population sample across the Chicago network. POLARIS was leveraged to simulate the detailed behavior of agents, with novel functions added that focuses on the integrated modeling of multimodal routing and the transfer behavior between SAVs and transit. Since most of the previous transit-related simulations do not optimize the multimodal routing for a mixed-use of SAVs and transit lines, the multimodal routing in this study ensures the best routes are considered by taking the travel time, cost, and number of transfers between different modes into account.

SAV D2D service accounts for 15% of the mode share under the assumption of \$0.50 per mile fare and households' willingness to relinquish their vehicle for future years. A fleet of 12k SAVs serving 5% of the Chicago population, or 1 SAV every 40 residents, could offer 15-minute service for trips averaging 4.6 miles. Operating for more than 4 hours, on average, each SAV served nearly 20 requests per day. Most SAV riders preferred to use the SAV D2D service for relatively short-distance trips, but the trip could be longer than 50 miles given the large nature of the region. Based on the distribution of the social welfare change, residents in the suburban area benefited most from the SAV D2D service, followed by those in the urban area. When the same SAV fleet offered both D2D service and FMLM service at the same time, the SAV fleet was more utilized, by serving 12% more requests per day per SAV with only a 4% increase in VMT. The transit use was also brought up from 5.4% to 6.3%, with a stable mode split among other modes compared to only using D2D service. The average trip distance of FMLM service was also shorter, most of which were between 1.7 to 1.9 miles. This indicated a prominent expansion of the transit catchment area, from a typical 0.25-mile average walking distance. The spatial patterns of SAV FMLM service also indicated such improvement, as many more boardings were observed in the TAZs along the transit lines (e.g., PACE suburban bus and the METRA commuter rail). Downtown Chicago is also the busy zone for FMLM trips, due to the CTA bus service. FMLM service boarding happened mostly across the day, especially during morning peak and midday. Trips to/from rail lines dominated the FMLM trips, compared to the bus stations, with a ratio of 6:1. When adding the FMLM service, the social welfare does not change much in the downtown area, because of the multiple travel choices. TAZs near transit stations in the suburban areas are more likely to have welfare gain. Lastly, when the SAV-based transit service was added to the scenario, the performance of the on-demand SAV fleet did not change much since the FMLM service mainly focused on connecting to rail. The social welfare change also showed a mixed pattern in both the urban and suburban areas. The reason for this is likely to be riders skipping SAVs due to small-size Abuses and the road congestion in the transit corridor caused by more frequently dispatched SAVs, although some riders enjoyed lower fares and more frequent service.

Although simulating FMLM in POLARIS yielded interesting and detailed observations, some limitations continue to exist and require future work. The FMLM service in this paper only offers access to and egress from bus and rail stations, but one would expect longer trips to connect airports. SAVs also have the potential to offer more variations of the SAV-based transit, like semi-fixed route service to replace or extend existing bus lines with more flexible vehicle sizes and fleet sizes. Therefore, there is a potential to simulate a larger integrated system with more realistic considerations for future planning. Different dynamic ride-sharing strategies can be tested to explore the best one that fits different SAV services in the large-scale network, like coordination with transit schedules (Vinet & Zhedanov, 2011) and large travel party size for sharing rides. The added mode of FMLM in the mode choice model assumes one alternative-specific constant value, which is the average of taxi and the conventional car mode. Sensitivity analysis can be

1 conducted to explore the change in the fleet and network performance as well as the social welfare under
2 different penetrations of FMLM service.

3 Based on the various service options tested here, SAVs can provide promising integration with future public
4 transportation systems. The low fare D2D service will be key to reducing vehicle ownership, encouraging
5 more shared rides, and gaining social welfare in the suburban area, while the FMLM service can increase
6 transit ridership and catchment area. The SAV-based transit will also offer a cost-efficient service, and the
7 network and fleet performance may be improved through integrations with on-demand service fleet and
8 new pricing strategies.

9

10 **AUTHOR CONTRIBUTIONS**

11 The authors confirm contribution to the paper as follows: study conception and design: Y. Huang, K.M.
12 Gurumurthy and K. Kockelman; Establishment of simulation models: Y. Huang and K.M. Gurumurthy;
13 analysis and interpretation of results: Y. Huang and K.M. Gurumurthy; draft manuscript preparation: Y.
14 Huang, K.M. Gurumurthy and K. Kockelman. All authors reviewed the results and approved the final
15 version of the manuscript.

16

17 **ACKNOWLEDGEMENT**

18 This paper and the work described were sponsored by the U.S. Department of Energy Vehicle Technologies
19 Office under the Systems and Modeling for Accelerated Research in Transportation Mobility Laboratory
20 Consortium, an initiative of the Energy Efficient Mobility Systems Program. David Anderson, a
21 Department of Energy Office of Energy Efficiency and Renewable Energy manager, played an important
22 role in establishing the project concept, advancing implementation, and providing ongoing guidance. The
23 authors thank Jade (Maizy) Jeong for her editing and submission support.

24

25 **REFERENCES**

- 26 Abe, R. (2021). Preferences of urban rail users for first- and last-mile autonomous vehicles: Price and
27 service elasticities of demand in a multimodal environment. *Transportation Research Part C:
28 Emerging Technologies*, 126, 103105. <https://doi.org/10.1016/j.trc.2021.103105>
- 29 American Public Transportation Association. (2021). *PACE*. [https://www.apta.com/research-technical-
30 resources/mobility-innovation-hub/pace/](https://www.apta.com/research-technical-resources/mobility-innovation-hub/pace/)
- 31 Auld, J., Hope, M., Ley, H., Sokolov, V., Xu, B., & Zhang, K. (2016). POLARIS: Agent-based modeling
32 framework development and implementation for integrated travel demand and network and
33 operations simulations. *Transportation Research Part C: Emerging Technologies*, 64, 101–116.
34 <https://doi.org/10.1016/j.trc.2015.07.017>
- 35 Auld, J., & Mohammadian, A. (2010). Efficient methodology for generating synthetic populations with
36 multiple control levels. *Transportation Research Record*, 2175(2175), 138–147.
37 <https://doi.org/10.3141/2175-16>
- 38 Auld, J., & Mohammadian, A. (2011). Planning-constrained destination choice in activity-based model:
39 Agent-based dynamic activity planning and travel scheduling. *Transportation Research Record*,
40 2254(2254), 170–179. <https://doi.org/10.3141/2254-18>
- 41 Auld, J., Mohammadian, A. K., & Doherty, S. T. (2009). Modeling activity conflict resolution strategies

- 1 using scheduling process data. *Transportation Research Part A: Policy and Practice*, 43(4), 386–
2 400. <https://doi.org/10.1016/j.tra.2008.11.006>
- 3 Auld, J., & Mohammadian, A. K. (2012). Activity planning processes in the Agent-based Dynamic
4 Activity Planning and Travel Scheduling (ADAPTS) model. *Transportation Research Part A:
5 Policy and Practice*, 46(8), 1386–1403. <https://doi.org/10.1016/j.tra.2012.05.017>
- 6 Auld, J., Rashidi, T., Javanmardi, M., & Mohammadian, A. (2011). Dynamic activity generation model
7 using competing hazard formulation. *Transportation Research Record*, 2254(2254), 28–35.
8 <https://doi.org/10.3141/2254-04>
- 9 Becker, H., Becker, F., Abe, R., Bekhor, S., Belgiawan, P. F., Compostella, J., Frazzoli, E., Fulton, L. M.,
10 Bicudo, D. G., Gurusurthy, K. M., & others. (2020). Impact of vehicle automation and electric
11 propulsion on production costs for mobility services worldwide. *Transportation Research Part A:
12 Policy and Practice*, 138, 105–126.
- 13 Bernhard, C., Oberfeld, D., Hoffmann, C., Weismüller, D., & Hecht, H. (2020). User acceptance of
14 automated public transport: Valence of an autonomous minibus experience. *Transportation
15 Research Part F: Traffic Psychology and Behaviour*, 70, 109–123.
16 <https://doi.org/10.1016/j.trf.2020.02.008>
- 17 Bösch, P. M., Becker, F., Becker, H., & Axhausen, K. W. (2018). Cost-based analysis of autonomous
18 mobility services. *Transport Policy*, 64, 76–91. <https://doi.org/10.1016/j.tranpol.2017.09.005>
- 19 Brownell, C., & Kornhauser, A. (2014). A driverless alternative: fleet size and cost requirements for a
20 statewide autonomous taxi network in New Jersey. *Transportation Research Record*, 2416(1), 73–
21 81.
- 22 Chicago Transit Authority. (2016). *Monthly Ridership Report. November*.
23 https://www.transitchicago.com/assets/1/6/Ridership_Report_-_2021-02.pdf
- 24 Childress, S., Nichols, B., Charlton, B., & Coe, S. (2015). Using an activity-based model to explore the
25 potential impacts of automated vehicles. *Transportation Research Record*, 2493(1), 99–106.
26 <https://doi.org/10.3141/2493-11>
- 27 de Jong, G., Daly, A., Pieters, M., & van der Hoorn, T. (2007). The logsum as an evaluation measure:
28 Review of the literature and new results. *Transportation Research Part A: Policy and Practice*, 41(9
29 SPEC. ISS.), 874–889. <https://doi.org/10.1016/j.tra.2006.10.002>
- 30 Fagnant, D. J., & Kockelman, K. M. (2018). Dynamic ride-sharing and fleet sizing for a system of shared
31 autonomous vehicles in Austin, Texas. *Transportation*, 45(1), 143–158.
32 <https://doi.org/10.1007/s11116-016-9729-z>
- 33 Gurusurthy, K. M., de Souza, F., Enam, A., & Auld, J. (2020). Integrating Supply and Demand
34 Perspectives for a Large-Scale Simulation of Shared Autonomous Vehicles. *Transportation
35 Research Record*, 2674(7), 181–192. <https://doi.org/10.1177/0361198120921157>
- 36 Gurusurthy, K. M., & Kockelman, K. M. (2018). Analyzing the dynamic ride-sharing potential for
37 shared autonomous vehicle fleets using cellphone data from Orlando, Florida. *Computers,
38 Environment and Urban Systems*, 71, 177–185.
39 <https://doi.org/10.1016/j.compenvurbsys.2018.05.008>
- 40 Gurusurthy, K. M., & Kockelman, K. M. (2020). How Much Does Greater Trip Demand and
41 Aggregation at Stops Improve Dynamic Ride-Sharing in Shared Autonomous Vehicle Systems?
42 *Presented at the Bridging Transportation Researchers Conference, August 2020., August*.
43 <https://ddot.dc.gov/release/mayor-bowser-and-ddot-announce-pick-up-drop-zone-pilot-program->

1 expansion

2 Gurumurthy, K. M., Kockelman, K. M., & Loeb, B. J. (2019). Sharing vehicles and sharing rides in real-
3 time: Opportunities for self-driving fleets. In *Advances in Transport Policy and Planning* (Vol. 4,
4 pp. 59–85). <https://doi.org/10.1016/bs.atpp.2019.09.001>

5 Gurumurthy, K. M., Kockelman, K. M., & Zuniga-Garcia, N. (2020). First-Mile-Last-Mile Collector-
6 Distributor System using Shared Autonomous Mobility. *Transportation Research Record*, 2674(10),
7 638–647. <https://doi.org/10.1177/0361198120936267>

8 Harb, M., Stathopoulos, A., Shiftan, Y., & Walker, J. L. (2021). What do we (Not) know about our future
9 with automated vehicles? *Transportation Research Part C: Emerging Technologies*, 123, 102948.
10 <https://doi.org/10.1016/j.trc.2020.102948>

11 Hou, Y., Young, S. E., Garikapati, V., Chen, Y., & Zhu, L. (2017). Initial Assessment and Modeling
12 Framework Development for Automated Mobility Districts. *ITS World Congress*, 1–13.

13 Huang, Y., Kockelman, K. M., Garikapati, V., Zhu, L., & Young, S. (2020). Use of Shared Automated
14 Vehicles for First-Mile Last-Mile Service: Micro-Simulation of Rail-Transit Connections in Austin,
15 Texas. *Transportation Research Record*, 2675(2), 135–149.
16 <https://doi.org/10.1177/0361198120962491>

17 Kockelman, K. M., & Lemp, J. D. (2011). Anticipating new-highway impacts: Opportunities for welfare
18 analysis and credit-based congestion pricing. *Transportation Research Part A: Policy and Practice*,
19 45(8), 825–838. <https://doi.org/10.1016/j.tra.2011.06.009>

20 Li, W., Kockelman, K. M., & Huang, Y. (2020). Traffic and Welfare Impacts of Credit-Based Congestion
21 Pricing Applications: An Austin Case Study. *Transportation Research Record*, 2675(1), 10–24.
22 <https://doi.org/10.1177/0361198120960139>

23 Martinez, L. M., & Viegas, J. M. (2017). Assessing the impacts of deploying a shared self-driving urban
24 mobility system: An agent-based model applied to the city of Lisbon, Portugal. *International*
25 *Journal of Transportation Science and Technology*. <https://doi.org/10.1016/j.ijtst.2017.05.005>

26 Menon, N., Barbour, N., Zhang, Y., Pinjari, A. R., & Mannering, F. (2019). Shared autonomous vehicles
27 and their potential impacts on household vehicle ownership: An exploratory empirical assessment.
28 *International Journal of Sustainable Transportation*, 13(2), 111–122.
29 <https://doi.org/10.1080/15568318.2018.1443178>

30 Merlin, L. A. (2017). Comparing automated shared taxis and conventional bus transit for a small city.
31 *Journal of Public Transportation*, 20(2), 19–39. <https://doi.org/10.5038/2375-0901.20.2.2>

32 Mirnig, A. G., Wallner, V., Gärtner, M., Meschtscherjakov, A., & Tscheligi, M. (2020). Capacity
33 Management in an Automated Shuttle Bus: Findings from a Lab Study. *Proceedings - 12th*
34 *International ACM Conference on Automotive User Interfaces and Interactive Vehicular*
35 *Applications, AutomotiveUI 2020*, 270–279. <https://doi.org/10.1145/3409120.3410665>

36 Moorthy, A., De Kleine, R., Keoleian, G., Good, J., & Lewis, G. (2017). Shared Autonomous Vehicles as a
37 Sustainable Solution to the Last Mile Problem: A Case Study of Ann Arbor-Detroit Area. *SAE*
38 *International Journal of Passenger Cars - Electronic and Electrical Systems*, 10(2), 328–336.
39 <https://doi.org/10.4271/2017-01-1276>

40 Nabors, D., Schneider, R., Leven, D., Lieberman, K., & Mitchell, C. (2008). *Pedestrian safety guide for*
41 *transit agencies* (Issue February).
42 https://safety.fhwa.dot.gov/ped_bike/ped_transit/ped_transguide/transit_guide.pdf

- 1 Narayanan, S., Chaniotakis, E., & Antoniou, C. (2020). Shared autonomous vehicle services: A
2 comprehensive review. *Transportation Research Part C: Emerging Technologies*, 111, 255–293.
3 <https://doi.org/10.1016/j.trc.2019.12.008>
- 4 Nordhoff, S., de Winter, J., Payre, W., van Arem, B., & Happee, R. (2019). What impressions do users
5 have after a ride in an automated shuttle? An interview study. *Transportation Research Part F:
6 Traffic Psychology and Behaviour*, 63, 252–269. <https://doi.org/10.1016/j.trf.2019.04.009>
- 7 Pinto, H. K. R. F., Hyland, M. F., Mahmassani, H. S., & Verbas, I. Ö. (2020). Joint design of multimodal
8 transit networks and shared autonomous mobility fleets. *Transportation Research Part C: Emerging
9 Technologies*, 113, 2–20. <https://doi.org/10.1016/j.trc.2019.06.010>
- 10 Quarles, N., Kockelman, K. M., & Mohamed, M. (2020). Costs and benefits of electrifying and
11 automating bus transit fleets. *Sustainability (Switzerland)*, 12(10), 3977.
12 <https://doi.org/10.3390/SU12103977>
- 13 Shaheen, S., & Cohen, A. (2018). Is it time for a public transit renaissance?: Navigating travel behavior,
14 technology, and business model shifts in a brave new world. *Journal of Public Transportation*,
15 21(1), 67–81. <https://doi.org/10.5038/2375-0901.21.1.8>
- 16 Shen, Y., Zhang, H., & Zhao, J. (2018). Integrating shared autonomous vehicle in public transportation
17 system: A supply-side simulation of the first-mile service in Singapore. *Transportation Research
18 Part A: Policy and Practice*, 113, 125–136. <https://doi.org/10.1016/j.tra.2018.04.004>
- 19 Snelder, M., Wilmlink, I., van der Gun, J., Jan Bergveld, H., Hoseini, P., & van Arem, B. (2019). Mobility
20 impacts of automated driving and shared mobility – explorative model and case study of the
21 province of north-Holland. *European Journal of Transport and Infrastructure Research*, 19(4), 291–
22 309. <https://doi.org/10.18757/ejtir.2019.19.4.4282>
- 23 Stocker, A., & Shaheen, S. (2019). *Shared Automated Vehicle (SAV) Pilots and Automated Vehicle Policy
24 in the U.S.: Current and Future Developments* (pp. 131–147). [https://doi.org/10.1007/978-3-319-
25 94896-6_12](https://doi.org/10.1007/978-3-319-94896-6_12)
- 26 Vakayil, A., Gruel, W., & Samaranayake, S. (2017). Integrating Shared-Vehicle Mobility-on-Demand
27 Systems with Public Transit. In *Conference Transportation Research Board 96th Annual Meeting*.
- 28 Verbas, Ö., Auld, J., Ley, H., Weimer, R., & Driscoll, S. (2018). Time-Dependent Intermodal A*
29 Algorithm: Methodology and Implementation on a Large-Scale Network. *Transportation Research
30 Record*, 2672(47), 219–230. <https://doi.org/10.1177/0361198118796402>
- 31 Vinet, L., & Zhedanov, A. (2011). A “missing” family of classical orthogonal polynomials. *Journal of
32 Physics A: Mathematical and Theoretical*, 44(8). <https://doi.org/10.1088/1751-8113/44/8/085201>
- 33 Yap, M. D., Correia, G., & van Arem, B. (2016). Preferences of travellers for using automated vehicles as
34 last mile public transport of multimodal train trips. *Transportation Research Part A: Policy and
35 Practice*, 94, 1–16. <https://doi.org/10.1016/j.tra.2016.09.003>
- 36 Zhao, L., & Malikopoulos, A. (2020). Enhanced Mobility With Connectivity and Automation: A Review
37 of Shared Autonomous Vehicle Systems. *IEEE Intelligent Transportation Systems Magazine*.
38 <https://doi.org/10.1109/MITS.2019.2953526>

39